

# Anomaly detection in link streams

**Supervision:** Matthieu Latapy (LIP6 - CNRS / SU), Esteban Bautista (LIP6 / SU) and Mehdi Naima (LIP6 / SU)

**Location:** Campus Pierre et Marie Curie, Sorbonne Université - 4 place Jussieu, 75005 Paris, France

**Topic:** Algorithms in complex networks

## Context

In many domains, data are endowed with a temporal-relational structure naturally modeled by a link stream [1]: a sequence of triplets  $(t, u, v)$ , indicating that  $u$  and  $v$  interacted at time  $t$ . Link streams capture a wealth of information that bears great potential for progress in high-impact areas. For instance, frauds or thefts in monetary transactions may leave signatures expressed as sub-streams that heavily interact in a short span of time [2]. Another example are network attacks which may be characterized as repetitive bursts of links that deviate from normal activity [3]. Consequently, it is crucial to develop algorithms that allow us to efficiently process and extract relevant information from link streams.

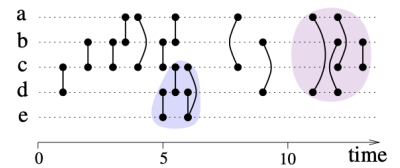


Figure 1: A link stream: temporal interactions between  $a, b, c, d, e$ . Interactions in shaded areas may be traces of frauds or attacks.

## Goal

A recent work [4] proposed an on-line algorithm to rank interactions in link streams and detect *microcluster anomalies*: suddenly arriving groups of suspiciously similar edges. However, the algorithm of [4] ranks triplet  $(u, v, t)$  solely based on how frequently  $u$  and  $v$  interacted in the recent past, meaning that rankings depend only on the *time properties* and not on the *structural properties* of link streams. We therefore aim to develop ranking algorithms that take into account both the time and structural properties of link streams.

Numerous recent works have generalized graph theoretical concepts to link streams [1, 5, 6], providing a solid foundation to analyze their structural properties. It is thus a timely challenge to leverage these concepts in the context of ranking algorithms. We are particularly interested in exploring the recent definitions of *temporal random walks* [7, 8, 9]. Our interest in random walks is four-fold: (i) they have already been successfully used to extend the PageRank algorithm [10]; (ii) their behavior is highly sensitive to structural properties; (iii) they are algorithmically efficient; and (iv) they allow to derive strong analytic results. We are also open to explore other centrality metrics, such as betweenness [11], which raise important algorithmic challenges but have great interpretability.

## Requested profile

This internship is directed at students with various background (complex networks, algorithmic, graph theory) with a strong interest in graph algorithmics and/or graph theory and its applications.

The intern will be part of the Complex Networks team of the LIP6 (SU-CNRS), located in Paris on Jussieu Campus. The internship will be supervised by Matthieu Latapy.

## References

- [1] M. Latapy, T. Viard, and C. Magnien, "Stream graphs and link streams for the modeling of interactions over time," *Social Network Analysis and Mining*, vol. 8, no. 1, p. 61, 2018.
- [2] D. Huang, D. Mu, L. Yang, and X. Cai, "Codetect: Financial fraud detection with anomaly feature detection," *IEEE Access*, vol. 6, pp. 19161–19174, 2018.
- [3] A. Wilmet, T. Viard, M. Latapy, and R. Lamarche-Perrin, "Degree-based outliers detection within ip traffic modelled as a link stream," in *2018 Network Traffic Measurement and Analysis Conference (TMA)*, pp. 1–8, IEEE, 2018.
- [4] S. Bhatia, B. Hooi, M. Yoon, K. Shin, and C. Faloutsos, "Midas: Microcluster-based detector of anomalies in edge streams," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 34, pp. 3242–3249, 2020.
- [5] T. Viard, M. Latapy, and C. Magnien, "Computing maximal cliques in link streams," *Theoretical Computer Science*, vol. 609, pp. 245–252, 2016.
- [6] C. Bertrand, H. Klaudel, M. Latapy, and F. Peschanski, "Pattern matching in link streams: A token-based approach," in *International Conference on Applications and Theory of Petri Nets and Concurrency*, pp. 227–247, Springer, 2018.
- [7] M. Starnini, A. Baronchelli, A. Barrat, and R. Pastor-Satorras, "Random walks on temporal networks," *Physical Review E*, vol. 85, no. 5, p. 056115, 2012.
- [8] L. E. Rocha and N. Masuda, "Random walk centrality for temporal networks," *New Journal of Physics*, vol. 16, no. 6, p. 063023, 2014.
- [9] J. Petit, M. Gueuning, T. Carletti, B. Lauwens, and R. Lambiotte, "Random walk on temporal networks with lasting edges," *Physical Review E*, vol. 98, no. 5, p. 052307, 2018.
- [10] P. Rozenshtein and A. Gionis, "Temporal pagerank," in *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pp. 674–689, Springer, 2016.
- [11] F. Simard, C. Magnien, and M. Latapy, "Computing betweenness centrality in link streams," *arXiv preprint arXiv:2102.06543*, 2021.